

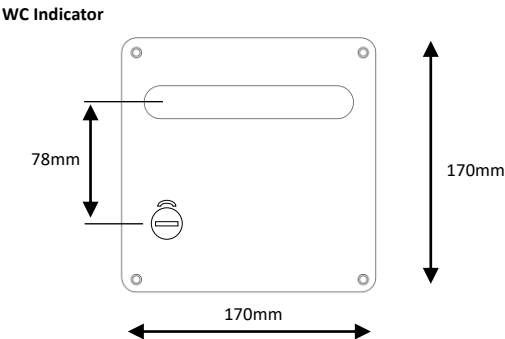


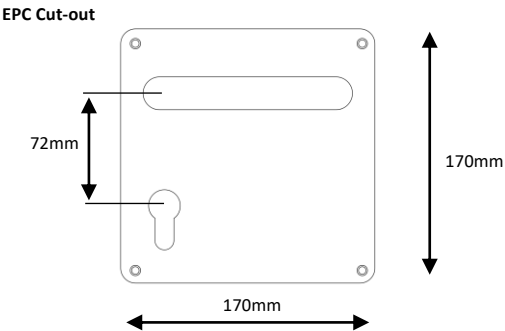

TECHNICAL SPECIFICATION

LEVER HANDLES

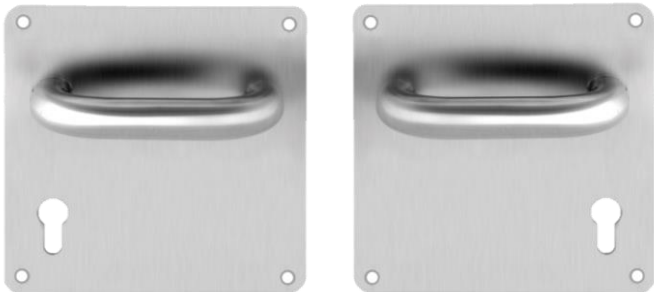

Lever Handles

Tubular construction sprung lever handle on 170x170mm square backplate

Code	Thickness	Handing	Finish	Cut out
LIL208	2mm	N	SSS	EPC
LIL209	2mm	N	PSS	EPC
LIL210	3mm	N	SSS	EPC
LIL211	3mm	N	PSS	EPC
LIL212L	2mm	L	SSS	WC
LIL212R	2mm	R	SSS	WC
LIL213L	2mm	L	PSS	WC
LIL213R	2mm	R	PSS	WC
LIL214L	3mm	L	SSS	WC
LIL214R	3mm	R	SSS	WC
LIL215L	3mm	L	PSS	WC
LIL215R	3mm	R	PSS	WC

N-Non Handed; **L**-Left Handed; **R**-Right Handed
EPC-Euro profile cylinder
WC- WC indicator

Specification

22mm dia spring assisted stainless steel SS304 grade tubular lever handle on 170x170mm square back plate
With 72mm CTC for EPC cut-out and 78mm CTC for WC indicator
Available in 2mm and 3mm thickness backplate
8mm x 8mm square spindle
Non-handed design for EPC cut-out
Handed design for WC indicator
Suitable for use on fire/smoke door assemblies
Supplied with suitable screws and fixings

Finishes

SSS - Satin stainless steel
PSS - Polished stainless steel

*SS316 available upon request subject to minimum order quantity