




TECHNICAL SPECIFICATION

LEVER HANDLES

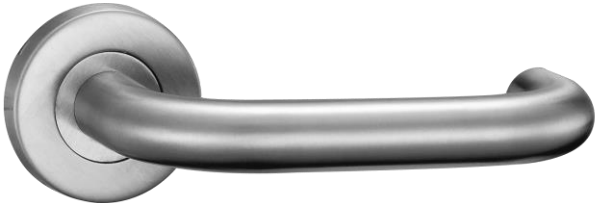

Lever Handles

Tubular construction sprung lever handle

Product Code

LIL003

Specification

19mm/22mm dia spring assisted stainless steel SS304 grade tubular lever handle
52mm push on rose with 8mm projection
Supplied with 52mm escutcheons prepared for Euro-profile cylinders
8mm x 8mm square spindle
Tested for 200,000 cycles
Suitable for use on fire/smoke door assemblies
Supplied with suitable back to back fixing screws
Add suffix S for same design on Square rose and escutcheons

Quality and performance

Successfully inhouse type tested for conformity to all the requirements of BS EN1906



Finishes

- SSS - Satin stainless steel
- PSS - Polished stainless steel
- PVDB - PVD Black
- PVDG - PVD Gold

*Special finish available upon request subject to minimum order quantity

*SS316 available upon request subject to minimum order quantity

