




TECHNICAL SPECIFICATION

LEVER HANDLES

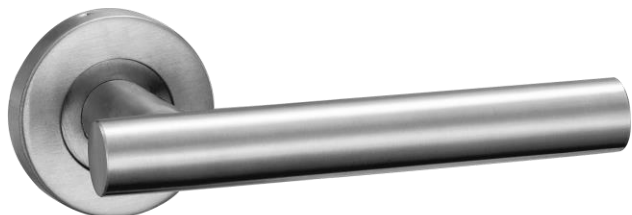

Lever Handles

Tubular construction sprung lever handle

Product Code

LIL007

Specification

19mm dia spring assisted stainless steel SS304 grade tubular lever handle

52mm push on rose with 8mm projection

Supplied with 52mm escutcheons prepared for Euro-profile cylinders

8mm x 8mm square spindle

Tested for 200,000 cycles

Suitable for use on fire/smoke door assemblies

Supplied with suitable back to back fixing screws

Add suffix S for same design on Square rose and escutcheons

Quality and performance

Successfully inhouse type tested for conformity to all the requirements of BS EN1906



Finishes

SSS - Satin stainless steel

PSS - Polished stainless steel

PVDB - PVD Black

PVDG - PVD Gold

*Special finish available upon request subject to minimum order quantity

*SS316 available upon request subject to minimum order quantity

